


CT 125 HYD

Specifications

Code	317588	317590	317589
Model	CT 125 HYD		
Max Thrust (kgf/lbs)	140 / 308	120 / 264	90 / 198
Hydraulic Power (k/w)	13,5	11	7,5
Propellers	Duo	Duo	Duo
Weight (kg)	12	12	12
A (mm)	2 10		
B (mm)	2 10		
C (mm)	2 15		
D (mm)	185		
E (mm)	6 to 7		

Boat Type	Boat Length (feet/meter)
Heavy Displacement High Windage & Cruising	35' - 46' / 10,6 - 14 m
Medium Displacement Medium Windage & Fast Cruising	42' - 55,5' / 12,8 - 17 m
Light Displacement Light Windage & Super Fast Cruising	46' - 60' / 14 - 18 m

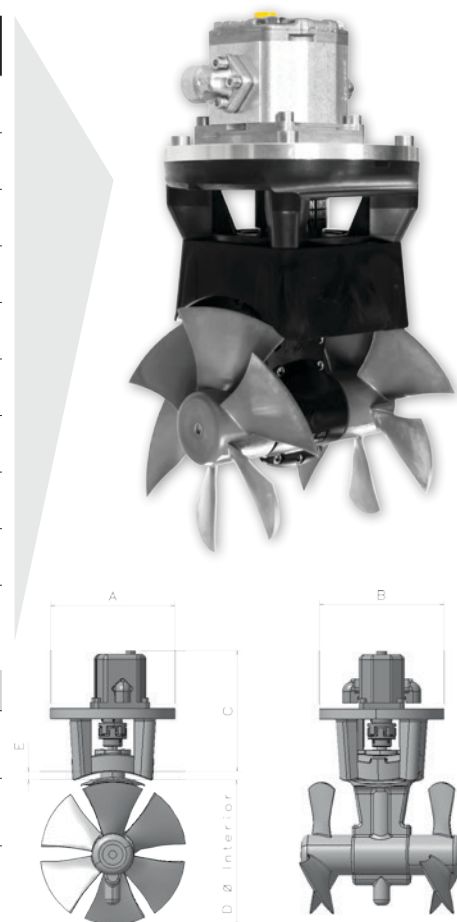

The smallest in the hydraulic tunnel thruster range, the twin propeller CT HYD 125 is manufactured using composite materials, has a 185mm diameter tunnel, a thrust rating of up to 140/308 kgf/lbs and integrates all the unique features of the range.

Unique Features:



Composite drive legs



Line shields



Zero maintenance



Case hardened spiro-conical gears



Branded hydraulic components



Water resistant



Unrivaled safety features

Control Panels:

Max Power's thruster control systems include a variety of advanced safety features.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible overheat warning
- Time delay switch between port and starboard thrust
- Software protection against short circuits

